

DOOSIGN

Light

Very light weight, the weight is only 15-20% of the normal LED display.



Durable

BIG packaging process
Durable, not afraid of bumps and scratches.



Bright

The maximum brightness reaches 3000nit and the brilliance has 32 different levels.



Waterproof

All electronic components are sealed,



Plug and play

No need for an external power adapter due to direct connections to 100-240Vac



Simple

Control multiple devices and manage your content all through the mobile app



Remote control

Not only can one device be controlled point-to-point on site, but multiple devices can also be remotely controlled.



Multi-Media

LED full color display technology can play text, images, dynamic images, videos, and other content.



LED DIGITAL SIGNAGE



LED

Digital Poster Board
Super slim & super light



IOT

Display devices based on IoT technology.



APP

Wireless control of devices through an APP



APPLICATION


LED DIGITAL SIGNAGE





BIG

TECHNOLOGY

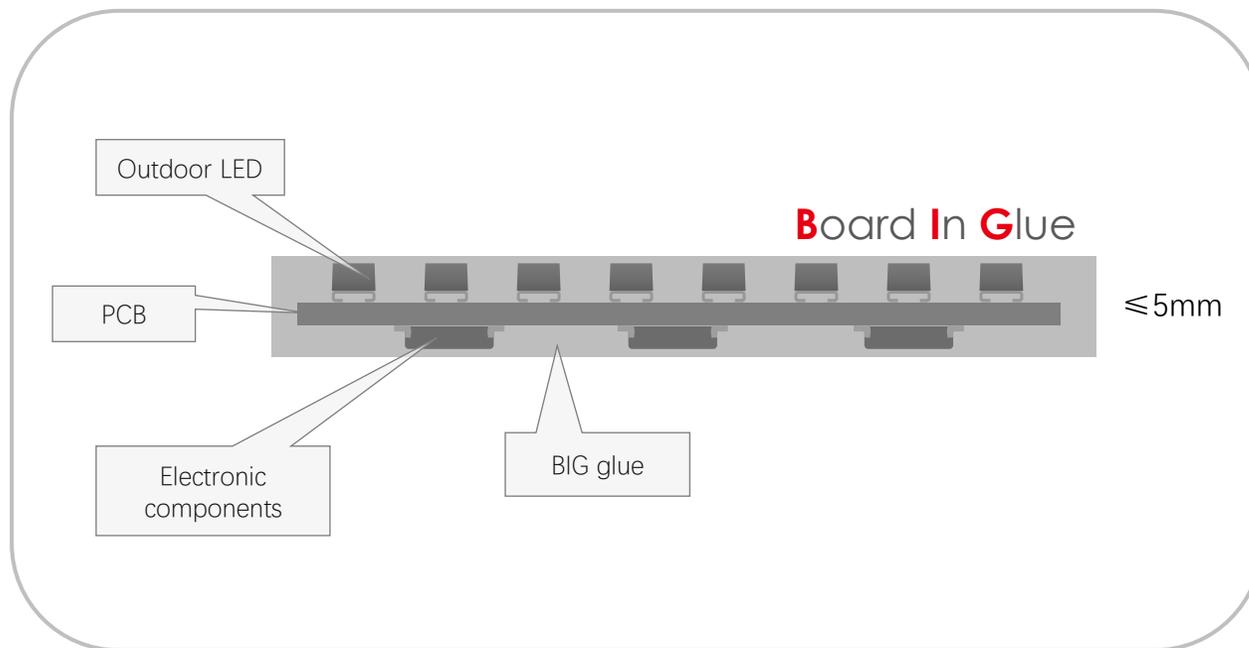

Sun Proof



Water-Proof




Impact Resistant



Scratch Resistant


All LED lights and electronic components are protected by glue
Provides unparalleled stability for the screen

CONTROL Model

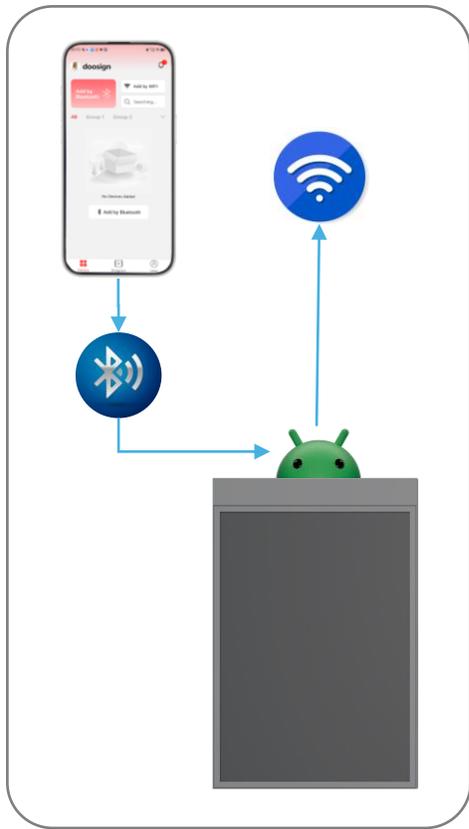


The phone connects to the screen via Bluetooth, then connects the screen to the WiFi network (LAN).

Send content to the screen through cloud servers.

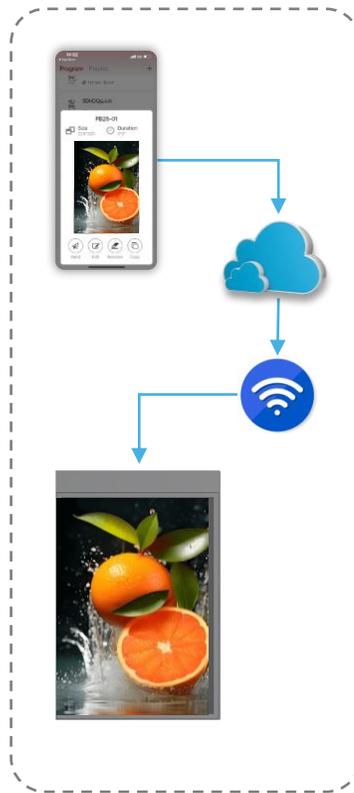


Model 1: **Cloud**

Send content to the screen through the LAN

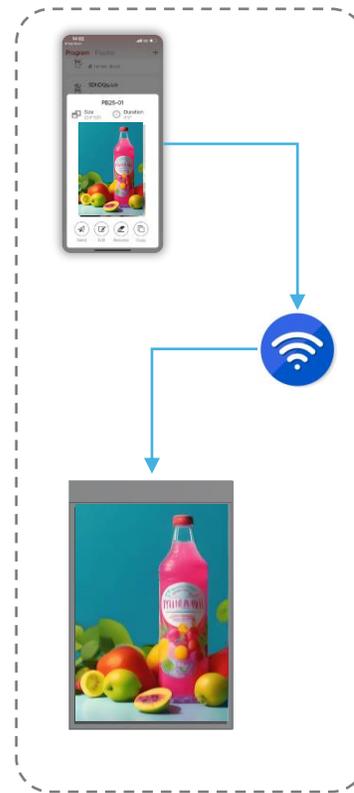


Model 2: **LAN**

Send content to the screen through the Hotspots

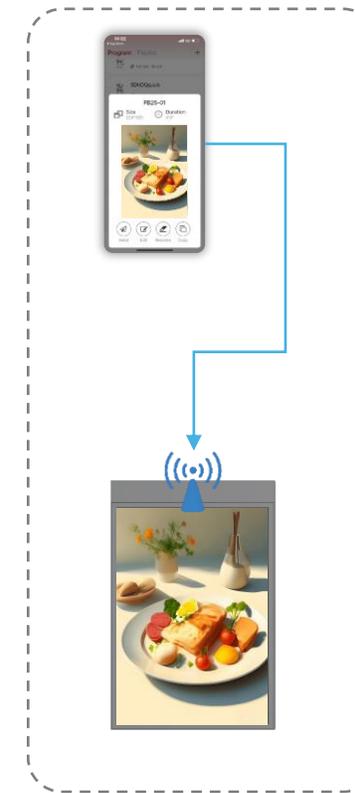

Model 3: **Hotspots**

Upload content directly to the screen through a USB drive.

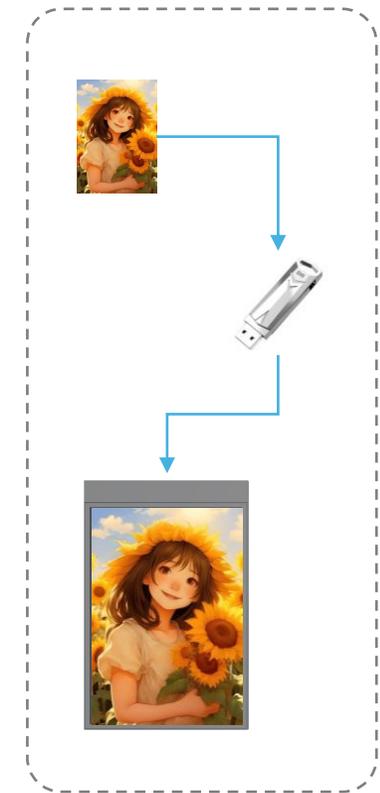

Model 4: **USB**

SOFTWARE

Mobile



Local



Remote

Search

dooplay



App Store



Google Play

Desktop



Local

Install the software onto the computer



Windows OS

WEB



Local

Enter the device IP address in the browser



Remote


Log in to the cloud platform



PB

SPECIFICATIONS

MODEL	PB-O-5	PB-O-2.5
Pixel Pitch	5 mm	2.5 mm
Display Matrix	112×160 dots	224 ×320 dots
Dimensions	602×920 mm	602×920 mm
Brightness	2500-3000 nits	2500-3000 nits
Ip Rating	IP 65	IP 65
Weight	6 kg	6.5 kg
Input	AC100-240V	AC100-240V
Power	Max. 200; Avg. 70	Max. 200; Avg. 70
Ram	256M	8G

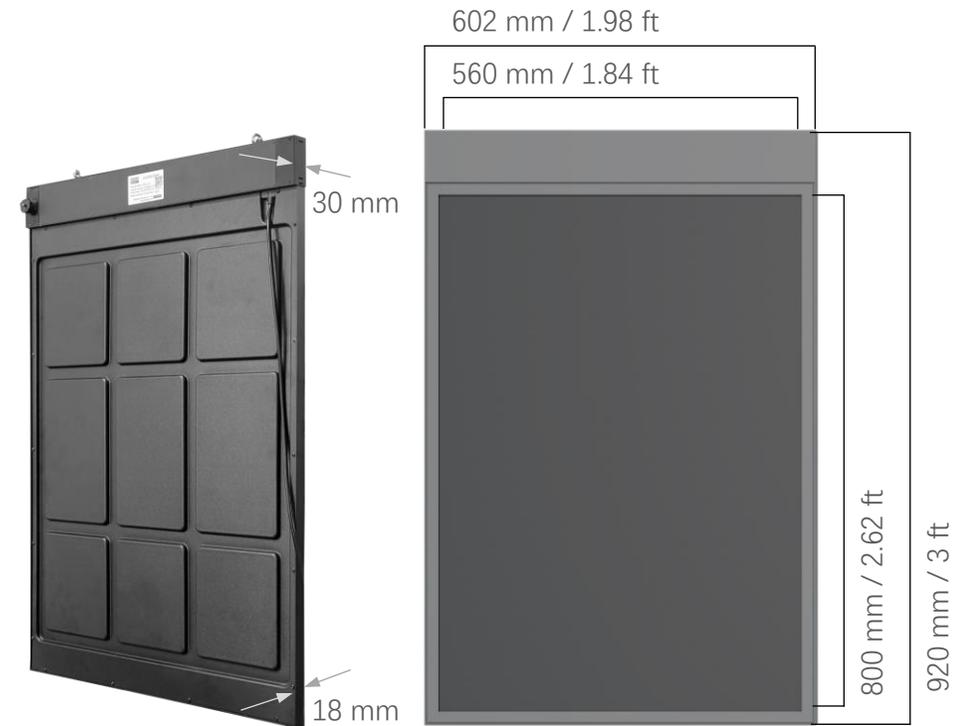

IP65


Application: Outdoor, Shop-front window



A-Frame
single side



A-Frame
double side

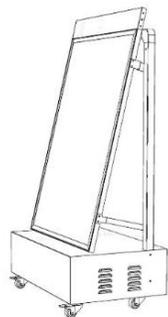

Battery Frame



Wall bracket



Hoisting

PE

SPECIFICATIONS


MODEL	PE-O-5	PE-O-3.9
Pixel Pitch	5.2 mm	3.91mm
Display Matrix	192×192 dots	256 ×256 dots
Active Dimensions	1000×1000 mm	1000×1000 mm
Overall Dimensions	1040×1120 mm	1040×1120 mm
Brightness	8000 nits	8000 nits
Ip Rating	IP 65	IP 65
Weight	15 kg	15 kg
Input	AC100-240V	AC100-240V
Power	Max. 600; Avg. 200	Max. 600; Avg. 200
Ram	8G	8G







Application: Outdoor, Shop-front

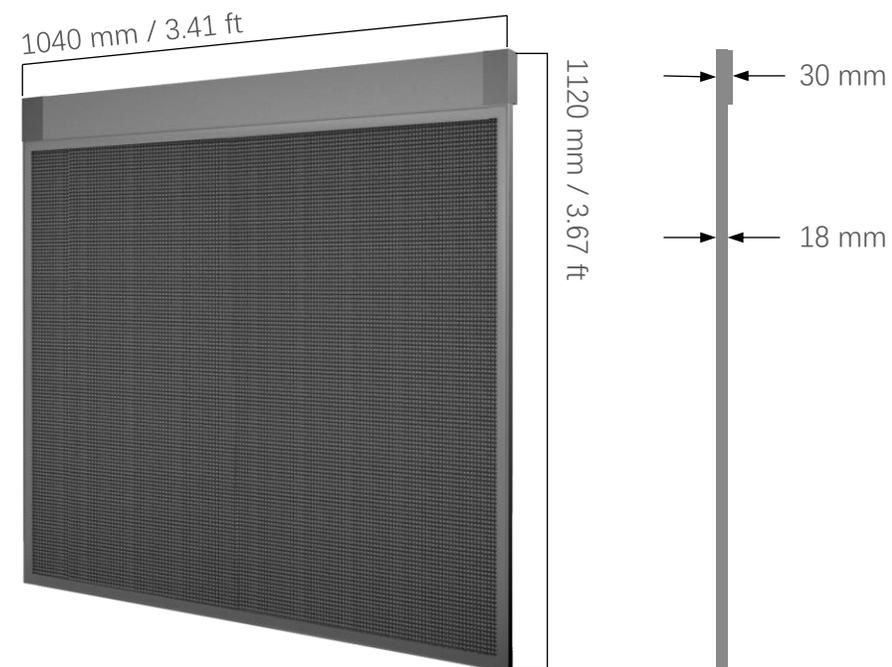

PA



FC CE

Usage: Hanging
Application: Indoor, semi outdoor

MODEL	PA-S-3
Pixel Pitch	3 mm
Display Matrix	160×64 dots
Dimensions	504×285 mm
Brightness	2500-3000 nits
Ip Rating	IP 43
Weight	1.9 kg
Input	AC100-240V
Power	Max. 40; Avg. 13
Ram	256M



PD



MODEL	PD-S-3
Pixel Pitch	3 mm
Displa Matrix	320×64 dots
Dimensions	984×285 mm
Brightness	2500-3000 nits
Ip Rating	IP 43
Weight	3.5 kg
Input	AC100-240V
Power	Max. 80; Avg. 26
Ram	256M

FC CE



Usage: Hanging
Application: Indoor, semi outdoor

CONTACT US



SHENZHEN DOOSIGN CO., LTD.

christine@doosign.com

tao@doosign.com

0086 13902311310